

# SIZE 4

## AREA GANTRY ROBOT AGR-4




THE AGR-4 IS DESIGNED FOR HANDLING WEIGHTS OF UP TO 555 KG, MASTERS VERTICAL STROKES UP TO APPROX. 3.5 M AND REACHES A MOVEMENT SPEED OF UP TO 2 M/S WITH ACCELERATION OF UP TO 4 M/S<sup>2</sup>.

WITH ITS THREE AXES, THE AGR IS IDEAL FOR COVERING LARGE WORKING AREAS, PARTICULARLY IN INTRALOGISTICS AND FOR ASSEMBLING LARGE MACHINES.

THE RACK AND PINION SYSTEM ALLOWS THE TRANSMISSION OF LARGE FORCES AS WELL AS PRECISE POSITIONING. THE DOVETAIL GUIDE ENABLES THE RACK AND ALL ATTACHED COMPONENTS TO BE POSITIONED FLEXIBLY DURING ASSEMBLY. THE LINEAR HORIZONTAL AXIS CAN BE EXTENDED TO OVER 100 M.

### LOAD CLASSES

- **Dynamic** ( $v = 2 \text{ m/s}$ ,  $a = 4 \text{ m/s}^2$ )  
with additional load of up to 350 kg\*
- **Balanced** ( $v = 1.5 \text{ m/s}$ ,  $a = 3 \text{ m/s}^2$ )  
with additional load of up to 450 kg\*
- **Efficient** ( $v = 1 \text{ m/s}$ ,  $a = 2 \text{ m/s}^2$ )  
with additional load of up to 550 kg\*

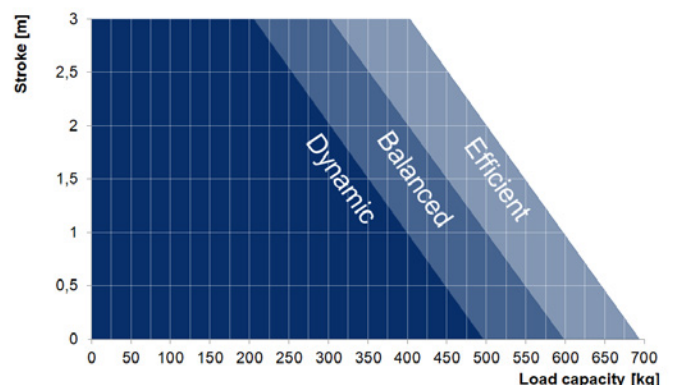

\*Load specifications refer to a vertical stroke of 1.5 m.

### MORE INFORMATION?

Do you require more detailed information or a CAD model of our product? Then please get in touch with our sales team.

[vertrieb@fibro-laepfle.de](mailto:vertrieb@fibro-laepfle.de)